
Centellis 2x00 User Card-10GE: Control via IPMI

Programmer's Reference

P/N: 6806800K89C

January 2020



© 2020 SMART Embedded Computing™, Inc.

All Rights Reserved.

Trademarks

The stylized "S" and "SMART" is a registered trademark of SMART Modular Technologies, Inc. and "SMART Embedded Computing" and the SMART Embedded Computing logo are trademarks of SMART Modular Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. These materials are provided by SMART Embedded Computing as a service to its customers and may be used for informational purposes only.

Disclaimer*

SMART Embedded Computing (SMART EC) assumes no responsibility for errors or omissions in these materials. **These materials are provided "AS IS" without warranty of any kind, either expressed or implied, including but not limited to, the implied warranties of merchantability, fitness for a particular purpose, or non-infringement.** SMART EC further does not warrant the accuracy or completeness of the information, text, graphics, links or other items contained within these materials. SMART EC shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials. SMART EC may make changes to these materials, or to the products described therein, at any time without notice. SMART EC makes no commitment to update the information contained within these materials.

Electronic versions of this material may be read online, downloaded for personal use, or referenced in another document as a URL to a SMART EC website. The text itself may not be published commercially in print or electronic form, edited, translated, or otherwise altered without the permission of SMART EC.

It is possible that this publication may contain reference to or information about SMART EC products, programming, or services that are not available in your country. Such references or information must not be construed to mean that SMART EC intends to announce such SMART EC products, programming, or services in your country.

Limited and Restricted Rights Legend

If the documentation contained herein is supplied, directly or indirectly, to the U.S. Government, the following notice shall apply unless otherwise agreed to in writing by SMART Embedded Computing.

Use, duplication, or disclosure by the Government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data clause at DFARS 252.227-7013 (Nov. 1995) and of the Rights in Noncommercial Computer Software and Documentation clause at DFARS 252.227-7014 (Jun. 1995).

SMART Embedded Computing, Inc.

2900 S. Diablo Way, Suite 190

Tempe, Arizona 85282

USA

*For full legal terms and conditions, visit www.smartembedded.com/ec/legal

Table of Contents

- About this Manual** 7

- 1 Introduction** 11
 - 1.1 Overview 11

- 2 Supported Commands** 13
 - 2.1 Standard IPMI Commands 13
 - 2.1.1 Global IPMI Commands 13
 - 2.1.2 FRU Inventory Commands 13
 - 2.1.3 Sensor Device Commands 14
 - 2.2 PICMG 3.0 Commands 15
 - 2.3 SMART EC Specific Commands 16
 - 2.3.1 Firmware Upgrade Commands 16
 - 2.3.1.1 Start Firmware Upgrade 17
 - 2.3.1.1.1 Request Data 17
 - 2.3.1.1.2 Response Data 17
 - 2.3.1.2 Continue Firmware Upgrade 17
 - 2.3.1.2.1 Request Data 18
 - 2.3.1.2.2 Response Data 18
 - 2.3.1.3 Finish Firmware Upgrade 18
 - 2.3.1.3.1 Request Data 18
 - 2.3.1.3.2 Response Data 19

- 3 FRU Information and Sensor Data Records** 21
 - 3.1 FRU and Sensor Information 21
 - 3.1.1 FRU Information 21
 - 3.1.2 Power Configuration 22
 - 3.1.3 Sensor Data Records 22

- A Related Documentation** 33
 - A.1 SMART Embedded Computing Documentation 33
 - A.2 Related Specifications 33

Table of Contents

List of Tables

Table 2-1	Supported Global IPMI Commands	13
Table 2-2	Supported FRU Inventory Commands	13
Table 2-3	Supported Sensor Device Commands	14
Table 2-4	Supported PICMG 3.0 Commands	15
Table 2-5	Firmware Upgrade Commands	17
Table 2-6	Response Data of Start Firmware Upgrade	17
Table 2-7	Request Data of Continue Firmware Upgrade	18
Table 2-8	Response Data of Continue Firmware Upgrade	18
Table 2-9	Request Data of Finish Firmware Upgrade	18
Table 2-10	Response Data of Finish Firmware Upgrade	19
Table 3-1	FRU Information of the Centellis 2x00 User Card-10GE	21
Table 3-2	Power Configuration	22
Table 3-3	Centellis 2x00 User Card-10GE: Control via IPMI Specific Sensors	22
Table 3-4	Temperature 0 Sensor	25
Table 3-5	Temperature 1 Sensor	26
Table 3-6	SFP Temperature Sensor	27
Table 3-7	Voltage +1.0V Sensor	28
Table 3-8	Voltage +3.3V Sensor	29
Table 3-9	Voltage +3.3V Management Sensor	30
Table 3-10	Voltage +5.0V Sensor	31
Table 3-11	PMD_CDR_Lock Sensor	32
Table 3-12	PMD Link Alarm Sensor	32
Table A-1	SMART EC Documentation	33
Table A-2	Related Specifications	33

List of Tables

About this Manual

Overview of Contents

This Programmer's Reference is intended for users such as system designers and system integrators qualified in electronics or electrical engineering. Users must have a working understanding of system design, Advanced Telecom Computing Architecture (AdvancedTCA) design and specifications, Intelligent Platform Management Interface (IPMI), and telephony telecommunications.

This manual is divided into following chapters and appendix:

Chapter 1, Introduction on page 11 gives an overview.

Chapter 2, Supported Commands on page 13 provides the standard IPMI commands.

Chapter 3, FRU Information and Sensor Data Records on page 21 provides FRU information.

Appendix A, Related Documentation on page 33 lists related documentation and specifications.



Abbreviations






This document uses the following abbreviations:

Abbreviation	Definition
AdvancedTCA	Advanced Telecom Computing Architecture
FRU	Field Replaceable Unit
ID	Identifier
IPMI	Intelligent Platform Management Interface
LIU	LAN Interface Unit
LUN	Logical Unit Number
PEM	Power Entry Module
PICMG	PCI Industrial Computer Manufacturers Group
RTM	Rear Transition Module
SDR	Sensor Data Record

Conventions

The following table describes the conventions used throughout this manual.

Notation	Description
0x00000000	Typical notation for hexadecimal numbers (digits are 0 through F), for example used for addresses and offsets
0b0000	Same for binary numbers (digits are 0 and 1)
bold	Used to emphasize a word
Screen	Used for on-screen output and code related elements or commands. Sample of Programming used in a table (9pt)
Courier + Bold	Used to characterize user input and to separate it from system output
<i>Reference</i>	Used for references and for table and figure descriptions
File > Exit	Notation for selecting a submenu
<text>	Notation for variables and keys
[text]	Notation for software buttons to click on the screen and parameter description
...	Repeated item for example node 1, node 2, ..., node 12
.	Omission of information from example/command that is not necessary at the time
..	Ranges, for example: 0..4 means one of the integers 0,1,2,3, and 4 (used in registers)
	Logical OR
	Indicates a hazardous situation which, if not avoided, could result in death or serious injury
	Indicates a hazardous situation which, if not avoided, may result in minor or moderate injury

Notation	Description
	Indicates a property damage message
	Indicates a hot surface that could result in moderate or serious injury
	Indicates an electrical situation that could result in moderate injury or death
<p>Use ESD protection</p> 	Indicates that when working in an ESD environment care should be taken to use proper ESD practices
	No danger encountered, pay attention to important information

Summary of Changes

Part Number	Date	Description
6806800K89A	September 2010	First version
6806800K89B	April 2014	Rebranded to Artesyn.
6806800K89C	January 2020	Rebrand to SMART Embedded Computing template. Updated title and document to reflect Centellis 2x00 (replaced Centellis 2000).

Introduction

1.1 Overview

This document provides a detailed description of default values of FRU information and sensor data records (SDRs) contained on the Centellis 2x00 User Card-10GE Ethernet uplink module of your system. The default values are given for reference purposes in case you want to restore the factory defaults.

For details on the IPMI commands that are used to read FRU information and SDRs refer to the *IPMI Specification Version 1.5*.

The Centellis 2x00 User Card-10GE provides the following information:

Feature	Available
Provide sensor data records	yes
Provide FRU inventory	yes
Provide system event log	no
Event generator	yes

Supported Commands

2.1 Standard IPMI Commands

The IPMC is fully compliant to the Intelligent Platform Management Interface v.1.5. This section provides information on which IPMI commands are supported.

2.1.1 Global IPMI Commands

The IPMC supports the following global IPMI commands.

Table 2-1 Supported Global IPMI Commands

Command	NetFn (Request/Response)	CMD	Comments
Get Device ID	0x06/0x07	0x01	-
Get Self Test Result	0x06/0x07	0x04	-

2.1.2 FRU Inventory Commands

Table 2-2 Supported FRU Inventory Commands

Command	NetFn (Request/Response)	CMD	Comments
Get FRU Inventory Area Info	0x0A/0x0B	0x10	-
Read FRU Data	0x0A/0x0B	0x11	-
Write FRU Data	0x0A/0x0B	0x12	This command returns the error code 0x80 if you attempt to write to the common header, Product Info Area, Board Info Area, Chassis Info Area, Board Connectivity record, Board Address table, Board Power Distribution Record of FRU ID 0.

Supported Commands

2.1.3 Sensor Device Commands

Table 2-3 Supported Sensor Device Commands

Command	NetFn (Request/Response)	CMD	Comments
Get Device SDR Info	0x04/0x05	0x20	-
Get Device SDR	0x04/0x05	0x21	-
Reserve Device SDR Repository	0x04/0x05	0x22	-
Get Sensor Hysteresis	0x04/0x05	0x25	-
Set Sensor Threshold	0x04/0x05	0x26	Most of the threshold-based sensors have fixed thresholds. Before using this command, check whether threshold setting is supported by using the Get Device SDR command.
Get Sensor Threshold	0x04/0x05	0x27	-
Set Sensor Event Enable	0x04/0x05	0x28	-
Get Sensor Event Enable	0x04/0x05	0x29	-
Rearm Sensor Events	0x04/0x05	0x2A	-
Get Sensor Event Status	0x04/0x05	0x2B	-
Get Sensor Reading	0x04/0x05	0x2D	-
Get Sensor Type	0x04/0x05	0x2F	-
Set Event Receiver	0x04/0x05	0x00	-
Get Event receiver	0x04/0x05	0x01	-
Platform Event	0x04/0x05	0x02	Any SMART EC IPMC works as event generator, i.e. it may issue the Platform Event command but the Centellis 2x00 User Card-10GE cannot write events to the SEL repository and acknowledge them.

2.2 PICMG 3.0 Commands

The SMART EC IPMC is a fully compliant AdvancedTCA intelligent Platform Management Controller i.e. it supports all required and mandatory AdvancedTCA commands as defined in the PICMG 3.0 and AMC 0.9x specifications.

Table 2-4 Supported PICMG 3.0 Commands

Command	NetFn (Request/Response)	CMD	Comments
Get PICMG Properties	0x2C/0x2D	0x00	-
Get Address Info	0x2C/0x2D	0x01	The Centellis 2x00 User Card-10GE only supports the short form with bytes 0 and 1 of the request data.
FRU Control	0x2C/0x2D	0x04	The Centellis 2x00 User Card-10GE only supports the cold reset option.
Get FRU LED Properties	0x2C/0x2D	0x05	-
Get FRU LED Color Capabilities	0x2C/0x2D	0x06	-
Set FRU LED State	0x2C/0x2D	0x07	-
Get FRU LED State	0x2C/0x2D	0x08	-
Set IPMB State	0x2C/0x2D	0x09	-
Set FRU Activation Policy	0x2C/0x2D	0x0A	-
Get FRU Activation Policy	0x2C/0x2D	0x0B	-
Set FRU Activation	0x2C/0x2D	0x0C	-
Get Device Locator Record ID	0x2C/0x2D	0x0D	The SMART EC IPMCs support the standard PICMG 3.0 and the extended AMC 0.9x versions of this command.
Set Port State	0x2C/0x2D	0x0E	-
Get Port State	0x2C/0x2D	0x0F	-
Compute Power Properties	0x2C/0x2D	0x10	-
Set Power Level	0x2C/0x2D	0x11	-

Supported Commands

Table 2-4 Supported PICMG 3.0 Commands (continued)

Command	NetFn (Request/Response)	CMD	Comments
Get Power Level	0x2C/0x2D	0x12	-
Get IPMB Link Info	0x2C/0x2D	0x18	-

2.3 SMART EC Specific Commands

The SMART EC IPMC supports several firmware upgrade commands which are not defined in the IPMI or PICMG 3.0 specification but are introduced by SMART EC:



- Before sending any of these commands, the shelf management software must check whether the receiving IPMI controller is an SMART EC IPMI controller, that means IPMC, by using the IPMI command 'Get Device ID'. Sending SMART EC specific commands to IPMI controllers which are not delivered by SMART EC will lead to no or undefined results.
- Implementing any of the SMART EC specific IPMI commands means that the software is not portable to other IPMI controllers that do not use the SMART EC IPMC firmware.
- Make sure to use these commands with care.

2.3.1 Firmware Upgrade Commands

SMART EC offers three commands to upgrade the IPMC firmware which can be used to write an upgrade function:

- Start Firmware Upgrade
- Continue Firmware Upgrade
- Finish Firmware Upgrade

The firmware upgrade session has to start with the Start Firmware Upgrade command which makes the target IPMC enter the firmware upgrade mode. The firmware image is sent to the target IPMC in several parts with multiple Continue Firmware Upgrade commands. Each part can have the size of an IPMB message length. When the whole firmware image is on the target IPMC, the process has to be finished with the Finish Firmware Upgrade command. During the firmware upgrade mode, the SMART EC IPMC may only execute the Continue Firmware Upgrade and Get Device ID commands.

The following table shows the firmware upgrade commands together with their network function and command code.

Table 2-5 Firmware Upgrade Commands

Command Name	NetFn (Request/Response)	CMD	Description
Start Firmware Upgrade	0x08/0x09	0x1B	See Start Firmware Upgrade on page 17
Continue Firmware Upgrade	0x08/0x09	0x1C	See Continue Firmware Upgrade on page 17
Finish Firmware Upgrade	0x08/0x09	0x1E	See Finish Firmware Upgrade on page 18

2.3.1.1 Start Firmware Upgrade

The Start Firmware Upgrade command puts the target IPMC into firmware upgrade mode. Only the Firmware Upgrade commands and the Get Device ID command are supported in firmware upgrade mode.

2.3.1.1.1 Request Data

No request data needs to be provided for this command.

2.3.1.1.2 Response Data

The following table lists the response data applicable to the Start Firmware Upgrade command.

Table 2-6 Response Data of Start Firmware Upgrade

Byte	Data Field
1	Completion Code 0x00: Command executed successfully and target IPMC entered firmware upgrade mode 0x01..0xFF: Error, that means IPMC cannot enter into firmware upgrade mode

2.3.1.2 Continue Firmware Upgrade

The Continue Firmware Upgrade command writes a part of the firmware image to the target IPMC. It also checks file integrity and makes the target IPMC leave the firmware upgrade mode if an error occurs. If an error occurs, the whole firmware upgrade sequence must be repeated beginning from the Start Firmware Upgrade command and the whole firmware upgrade image must be retransmitted.

Supported Commands

2.3.1.2.1 Request Data

The following table lists the request data applicable to the Continue Firmware Upgrade command.

Table 2-7 Request Data of Continue Firmware Upgrade

Byte	Data Field
1..23	Firmware content to be sent to the target IPMC. The firmware image is an extended INTEL hex file. The whole message length is defined by the maximum IPMB message length.

2.3.1.2.2 Response Data

The following table lists the response data of the Continue Firmware Upgrade command.

Table 2-8 Response Data of Continue Firmware Upgrade

Byte	Data Field
1	Completion Code 0x00: Command executed successfully 0x1..0xFF: Error, that means the IPMC left the firmware upgrade mode

2.3.1.3 Finish Firmware Upgrade

The Finish Firmware Upgrade command makes the target IPMC leave the firmware upgrade mode.

2.3.1.3.1 Request Data

The following table lists the request data applicable to the Finish Firmware Upgrade command.

Table 2-9 Request Data of Finish Firmware Upgrade

Byte	Data Field
1..23	None

2.3.1.3.2 Response Data

The following table lists the response data applicable to the Finish Firmware Upgrade command.

Table 2-10 Response Data of Finish Firmware Upgrade

Byte	Data Field
1	Completion Code 0: Command executed successfully 0x01..0xFF: Error

Supported Commands

FRU Information and Sensor Data Records

3.1 FRU and Sensor Information

The Centellis 2x00 User Card-10GE provides FRU information and sensor data records.

3.1.1 FRU Information

Table 3-1 FRU Information of the Centellis 2x00 User Card-10GE

Area	Description	Value	Access
Internal use area	not used		-
Board info area	Manufacturing date/time	According to the IPMI FRU specification	r
	Board manufacturer	SMART EC	r
	Board product name	PCA,USERCARD-SFP+10G-REV.1.1-C2000/6E	r
	Board serial number	Defined by SMART EC	r
	Board part number	Defined by SMART EC	r
Product info area	Product manufacturer	SMART EC	r
	Product name	CENT-2000-UC-10GE	r
	Product serial number	Defined by SMART EC	r
	Product part number	Defined by SMART EC	r
	Product Version	Defined by SMART EC	-
Multirecord area	SMART EC user info are	SMART EC OEM User Info Area. Format: 0x48, 0x0e, 0x00, 0x00 followed by record content	r/w
	Custom usage	Not formatted as records. Min. 256 bytes available	r/w

FRU Information and Sensor Data Records

3.1.2 Power Configuration

Table 3-2 Power Configuration

Feature	Value
Dynamic power support	No
Number of power draw levels	1
Power draw	70W

3.1.3 Sensor Data Records

The sensors available on the Centellis 2x00 User Card-10GE are shown in the table below. Except for the temperature sensors, they are identical for the front and rear Centellis 2x00 User Card-10GE.

Table 3-3 Centellis 2x00 User Card-10GE: Control via IPMI Specific Sensors

Sensor Name	Sensor Type Code Description	Generate Event	Event/ Reading Type Code
HotSwap HotSwap (F0h)	Hot swap sensor	Yes	Sensor specific (6Fh)
Ejector_State Button (14h)	Ejector state sensor		Sensor specific (6Fh)
IPMC_State OEM (D5h)	IPMC state OEM sensor		Sensor specific (6Fh)
IPMB0_State IPMB (F1h)	IPMB0 state sensor		Sensor specific (6Fh)
SFP_Enable Other FRU (1Ah)	Enable/Disable SFP Writable OEM sensor	No	Type enable (9)
SFP_TXDIS Other FRU (1Ah)	SFP TXDIS signal	Yes	Reading type failure (4)
SFP_LOS Other FRU (1Ah)	Loss of signal indication	Yes	Reading type failure (4)
SFP_TXFAULT Other FRU (1Ah)	SFP transmit fault	Yes	Reading type failure (4)
SFP_PRESENT Other FRU (1Ah)	SFP presence sensor	Yes	Presence (8)
PMD_LOSS_SIGNAL Monitor IC (26h)	Loss of signal indication	Yes	Reading type failure (4)
PMD_CMU_LOCK Monitor IC (26h)	PMD CMU Lock detect	Yes	Reading type failure (4)

FRU Information and Sensor Data Records


Table 3-3 Centellis 2x00 User Card-10GE: Control via IPMI Specific Sensors

Sensor Name	Sensor Type Code Description	Generate Event	Event/ Reading Type Code
PMD_LinkAlarm Monitor IC (26h)	Loss of signal indication	Yes	Reading Type failure (4)
PMD_CDR_LOCK Monitor IC (26h)	PMD CDR Lock detect	Yes	Reading type failure (4)
VOLTAGE_1_0 Voltage (02h)	+1.0V sensor	Yes	Threshold (1)
VOLTAGE_3_3 Voltage (02h)	+3.3V sensor	Yes	Threshold (1)
VOLTAGE_3_3_MGMT Voltage (02h)	Management +3.3V sensor	Yes	Threshold (1)
VOLTAGE_5_0 Voltage (02h)	+5.0V sensor	Yes	Threshold (1)
TEMPERATURE0 Temperature (01h)	Temperature sensor 0	Yes	Threshold (1)
TEMPERATURE1 Temperature (01h)	Temperature sensor 2	Yes	Threshold (1)
SFP_TEMPERATURE Temperature (01h)	SFP Temperature sensor	Yes	Threshold (1)

FRU Information and Sensor Data Records

The following figure shows the location of the temperature sensors of the front and rear Centellis 2x00 User Card-10GE.

Figure 3-1 Temperature Sensors on Front Centellis 2x00 User Card-10GE

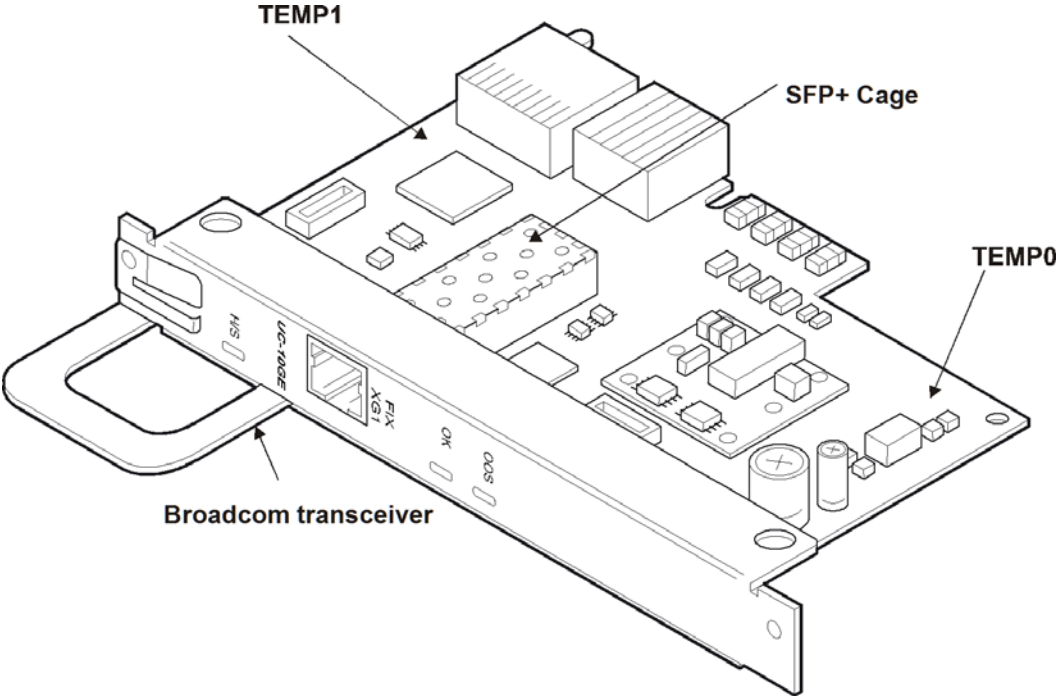

FRU Information and Sensor Data Records

The following tables describe each sensor in detail.

Table 3-4 Temperature 0 Sensor

Feature	Raw Value	Description
Sensor Name	Temperature 0	-
Sensor LUN	0x01	-
Sensor Number	0x00	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Temperature
Event/Reading type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x95	-
Assertion Event Mask (Byte 16)	0x7A	-
Deassertion Event Mask (Byte 17)	0x95	-
Deassertion Event Mask (Byte 18)	0x7A	-
Threshold Mask (Byte 19)	0x3F	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x01	Degrees C
Upper non-recoverable threshold	0x70	-
Upper critical threshold	0x65	-
Upper non-critical threshold	0x60	-
Lower non-recoverable threshold	0x02	-
Lower critical threshold	0x06	-
Lower non-critical threshold	0x10	-
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

FRU Information and Sensor Data Records

Table 3-5 Temperature 1 Sensor

Feature	Raw Value	Description
Sensor Name	Temperature 1	-
Sensor LUN	0x01	-
Sensor Number	0x01	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Temperature
Event/Reading type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x95	-
Assertion Event Mask (Byte 16)	0x7A	-
Deassertion Event Mask (Byte 17)	0x95	-
Deassertion Event Mask (Byte 18)	0x7A	-
Threshold Mask (Byte 19)	0x3F	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x01	Degrees C
Upper non-recoverable threshold	0x70	-
Upper critical threshold	0x65	-
Upper non-critical threshold	0x60	-
Lower non-recoverable threshold	0x02	-
Lower critical threshold	0x06	-
Lower non-critical threshold	0x10	-
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

Table 3-6 SFP Temperature Sensor

Feature	Raw Value	Description
Sensor Name	SFP Temperature	-
Sensor LUN	0x01	-
Sensor Number	0x08	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Temperature
Event/Reading type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x85	-
Assertion Event Mask (Byte 16)	0x32	-
Deassertion Event Mask (Byte 17)	0x85	-
Deassertion Event Mask (Byte 18)	0x32	-
Threshold Mask (Byte 19)	0x1B	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x01	Degrees C
Upper non-recoverable threshold	0x00	-
Upper critical threshold	0x73	-
Upper non-critical threshold	0x55	-
Lower non-recoverable threshold	0x00	-
Lower critical threshold	0xFB	-
Lower non-critical threshold	0x00	-
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

FRU Information and Sensor Data Records

Table 3-7 Voltage +1.0V Sensor

Feature	Raw Value	Description
Sensor Name	Voltage +1.0V	-
Sensor LUN	0x00	-
Sensor Number	0x0A	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x14	-
Assertion Event Mask (Byte 16)	0x6A	-
Deassertion Event Mask (Byte 17)	0x14	-
Deassertion Event Mask (Byte 18)	0x6A	-
Threshold Mask (Byte 19)	0x36	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x04	Volts
Upper non-recoverable threshold	0x9E	1.15
Upper critical threshold	0x94	1.10
Upper non-critical threshold	0x8A	1.05
Lower non-recoverable threshold	0x61	0.85
Lower critical threshold	0x6B	0.90
Lower non-critical threshold	0x75	0.95
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

Table 3-8 Voltage +3.3V Sensor

Feature	Raw Value	Description
Sensor Name	Voltage +3.3V	-
Sensor LUN	0x00	-
Sensor Number	0x01	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x14	-
Assertion Event Mask (Byte 16)	0x6A	-
Deassertion Event Mask (Byte 17)	0x14	-
Deassertion Event Mask (Byte 18)	0x6A	-
Threshold Mask (Byte 19)	0x36	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x04	Volts
Upper non-recoverable threshold	0xCB	3.80
Upper critical threshold	0xA9	3.63
Upper non-critical threshold	0x87	3.47
Lower non-recoverable threshold	0x01	2.81
Lower critical threshold	0x22	2.97
Lower non-critical threshold	0x44	3.14
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

FRU Information and Sensor Data Records

Table 3-9 Voltage +3.3V Management Sensor

Feature	Raw Value	Description
Sensor Name	Voltage +3.3VMG	-
Sensor LUN	0x00	-
Sensor Number	0x0B	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x14	-
Assertion Event Mask (Byte 16)	0x6A	-
Deassertion Event Mask (Byte 17)	0x14	-
Deassertion Event Mask (Byte 18)	0x6A	-
Threshold Mask (Byte 19)	0x36	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x04	Volts
Upper non-recoverable threshold	0xCB	3.80
Upper critical threshold	0xA9	3.63
Upper non-critical threshold	0x87	3.47
Lower non-recoverable threshold	0x01	2.81
Lower critical threshold	0x22	2.97
Lower non-critical threshold	0x44	3.14
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

Table 3-10 Voltage +5.0V Sensor

Feature	Raw Value	Description
Sensor Name	Voltage +5.0V	-
Sensor LUN	0x00	-
Sensor Number	0x02	-
Entity ID	0x2C	I/O Module
Sensor Type	0x01	Threshold
Assertion Event Mask (Byte 15)	0x14	-
Assertion Event Mask (Byte 16)	0x6A	-
Deassertion Event Mask (Byte 17)	0x14	-
Deassertion Event Mask (Byte 18)	0x6A	-
Threshold Mask (Byte 19)	0x36	-
Threshold Mask (Byte 20)	0x00	-
Base Unit	0x04	Volts
Upper non-recoverable threshold	0xFD	5.75
Upper critical threshold	0xD4	5.50
Upper non-critical threshold	0xAB	5.25
Lower non-recoverable threshold	0x07	4.25
Lower critical threshold	0x30	4.50
Lower non-critical threshold	0x59	4.75
Positive going hysteresis value	0x02	-
Negative going hysteresis value	0x02	-

FRU Information and Sensor Data Records

Table 3-11 PMD_CDR_Lock Sensor

Feature	Raw Value	Description
Sensor Name	PMD_CRD_Lock	-
Sensor LUN	0x00	-
Sensor Number	0x6C	-
Entity ID	0x2C	I/O Module
Sensor Type	0x26	Monitor ASIC IC
Assertion Event Mask (Byte 15)	0x03	-
Assertion Event Mask (Byte 16)	0x00	-
Deassertion Event Mask (Byte 17)	0x00	-
Deassertion Event Mask (Byte 18)	0x00	-
Reading/Threshold Mask (Byte 19)	0x03	-
Reading/Threshold Mask (Byte 20)	0x00	-

Table 3-12 PMD Link Alarm Sensor

Feature	Raw Value	Description
Sensor Name	PMD Link Alarm	-
Sensor LUN	0x00	-
Sensor Number	0x6C	-
Entity ID	0x2C	I/O Module
Sensor Type	0x26	Monitor ASIC IC
Assertion Event Mask (Byte 15)	0x03	-
Assertion Event Mask (Byte 16)	0x00	-
Deassertion Event Mask (Byte 17)	0x00	-
Deassertion Event Mask (Byte 18)	0x00	-
Reading/Threshold Mask (Byte 19)	0x03	-
Reading/Threshold Mask (Byte 20)	0x00	-

Related Documentation

A.1 SMART Embedded Computing Documentation

The documentation listed is referenced in this manual. Technical documentation can be found by using the Documentation Search at <https://www.smartembedded.com/ec/support/> or you can obtain electronic copies of SMART EC documentation by contacting your local sales representative.

Table A-1 SMART EC Documentation

Document Title	Document Number
ATCA-MF105 Installation and Use	6806800G44
ATCA-MF105: Control via IPMI Programmer's Reference	6806800G93
ATCA-7150 Installation and Use	6806800E88
ATCA-7150: Control via IPMI Programmer's Reference	6806800E85
RTM-ATCA-7150 Installation and Use	6806800E87
MEZC-RTM-ATCA-7150-FC Installation Information	6806800F90

A.2 Related Specifications

For additional information, refer to the following table for related specifications. As an additional help, a source for the listed document is provided. Please note that, while these sources have been verified, the information is subject to change without notice.

Table A-2 Related Specifications

Document Title	Source
PICMG 3.0 ATCA Rev. 3.0	www.picmg.org
Platform Management FRU Information Storage Definition Version 1.1	www.intel.com
IPMI-Intelligent Platform Management Interface Version 1.5	www.developer.intel.com

Related Documentation

